



SC-3 High Efficiency Impeller

High efficient, low shear impeller with laser designed curved blades providing high strength and low weight which is ideal for long overhung shaft applications

Deep tank mixing applications require long agitator shaft extensions, as well as lower rotational speeds to avoid critical speed problems. In the past, to develop the required flow in deep tanks, it was necessary to reduce the impeller speed and increase the impeller diameter to avoid critical speed problems. This technique added weight, as well as cost, and often pushed impeller-to-tank diameter ratios over 50%. When the impeller-to-tank diameter ratio exceeds 50%, a typical high efficiency impeller loses mixing effectiveness.

The Chemineer® SC-3 Impeller features an advanced design that produces flow characteristics of much larger impellers, without the added weight or the resulting loss in pumping efficiency. The highly efficient SC-3 Impeller's reduced weight allows for the use of longer shaft extensions for deeper tanks, and resolves associated critical speed limitations. The use of an SC-3 Impeller can frequently produce significant agitator cost savings.



Our laboratory LDA (Laser Doppler Anemometry) system was used

extensively in the design of the SC-3 Impeller. Because large variations in discharge velocity can produce inefficiencies, significant efforts were made in the development of the SC-3 to maintain a relatively flat velocity profile. The discharge velocity profile is flatter than for most other high efficiency impellers under turbulent flow conditions.

Optimal Design

Design Requirement	Solution	Benefit
Long in-tank shafts without steady bearings	Lighter-weight impeller	Ability to effectively operate in taller tanks while conserving drive size, maintaining ChemScale level
Operate below first critical speed	High-flow impeller	Allows for smaller SC-3 diameters. Lower impeller weights are thus achieved, resulting in robust shaft designs operating below critical speed with unrestricted speed turndown
Long-lasting	Advanced blade design	As a result of the contoured blade form, the SC-3 is inherently stronger than older designs and is able to handle demanding, high-fluid-force mixing conditions
Materials variety	High-alloys and coatings	316SS and Hastelloy C-276 are standard. Other alloys and coatings available upon request

Average Velocity Profile Comparison

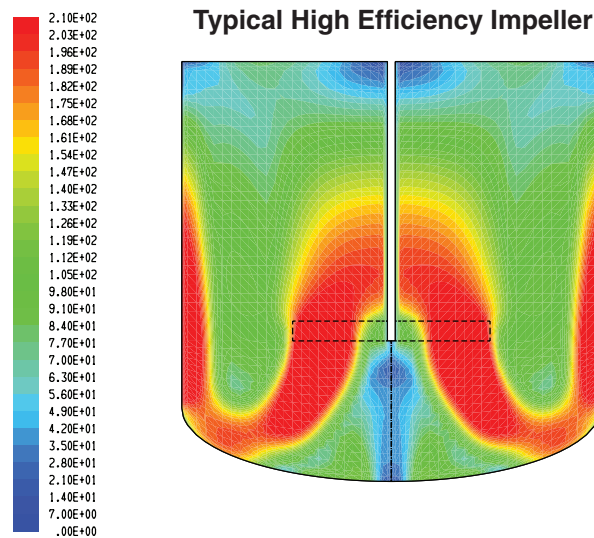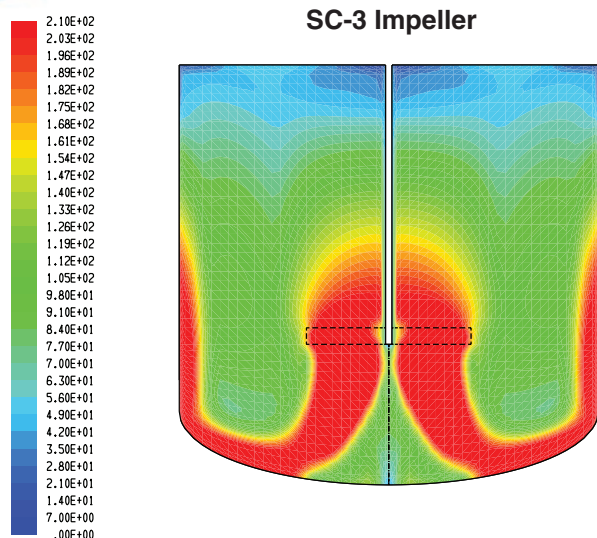

Maximum Results

Design Requirement	Solution	Benefit
Blending and solids suspension	"Flat" velocity profile	It is a highly axial, low shear, high efficiency impeller developed using both LDA and DPIV (Digital Particle Image Velocimetry) technologies. Average Velocity Profiles illustrate better SC-3 suspension capability compared to other high-efficiency impellers, even at larger D/T's (impeller-to-tank diameter ratio).
Low shear	"Flat" velocity profile	Flatter profiles yield significantly lower shear gradients. Well-suited for shear-sensitive applications.
Higher viscosity blending	Optimal angle of attack	Better performance at lower Reynolds Numbers (N_{re}) than other H.E. impellers
Small tank opening	High-flow impeller	A high flow number enables the SC-3 to maintain ChemScale level at smaller diameters



Chemineer, Inc.
5870 Poe Avenue
Dayton, Ohio 45414
Telephone: (937) 454-3200
Email: chemineer@nov.com

Chemineer, Ltd.
7 Cranmer Road, West Meadows
Derby DE21 6XT, England
Telephone: 44-1-332-546700
Email: chemineeruk@nov.com



Chemineer China
Room 2006, Modern Plaza
369 Xianxia Road
Shanghai, China 200336
Telephone: 86-21-61240001
Email: chemineercn@nov.com



Chemineer, Inc.
125 Flagship Drive
North Andover, MA 01845
Telephone: (978) 687-0101
Email: navinfo@nov.com

www.kenics.com
www.greercomixers.com



Chemineer International Sales Offices:
Brazil
Mexico
Singapore

Bulletin 716-A

1-800-643-0641 • www.chemineer.com

National Oilwell Varco has produced this brochure for general information only, and it is not intended for design purposes. Although every effort has been made to maintain the accuracy and reliability of its contents, National Oilwell Varco in no way assumes responsibility or liability for any loss, damage or injury resulting from the use of information and data herein. All applications for the material described are at the user's risk and are the user's responsibility. All brands listed are trademarks of National Oilwell Varco.